

Nilfisk Industrial Combination Machines

Nilfisk CR 1200/1400



Taking industrial cleaning to a higher level



BETTER DESIGN FOR LOWER CLEANING COSTS

The CR1200 and CR1400 are complete floor cleaning solutions as they can sweep, scrub and dry in a single pass or be used for just sweeping or scrubbing depending on the application.

Nothing is left to chance. All models are available as diesel, petrol or LPG with the CR 1200 also having battery variants to meet the specific cleaning applications. The tank capacity is larger than any other comparable machine, providing longer running time, higher productivity and lower cleaning costs. Operator comfort is at an all-time high, thereby reducing fatigue and increasing safety and performance. Maintenance has never been easier thanks to the 'no tools' service access points.



Nilfisk CR 1200



Variable scrub deck pressures. With the choice of 55, 110 and 180 kg down force, even the heaviest ground in dirt is removed efficiently.



The tip-out recovery tank makes cleaning easy and reduces bacterial build-up



Setting new standards

- Modular design offers a range of product variations to fit customer applications perfectly, and to meet different budget levels
- Longer running time between tank refills thanks to increased capacity-provides better cleaning performance and higher productivity for lower overall costs
- The operator's seating position is ergonomically designed, offering a clear view of the working zone for greater safety and less fatigue
- 'No tools' maintenance access points makes routine service and cleaning fast and easy
- Powerful climbing ability, up to 14% with full load



Adjustable steering wheel position provides optimal operator comfort and improved safety.



The hopper is easily emptied without restricting the operator's visibility thanks to its smart off-set design




A unique safety block system for the hopper can be activated by the operator from the seating position



No tools needed in order to access key components. Maintenance is fast and simple

Bigger cleaning capacity – Higher productivity

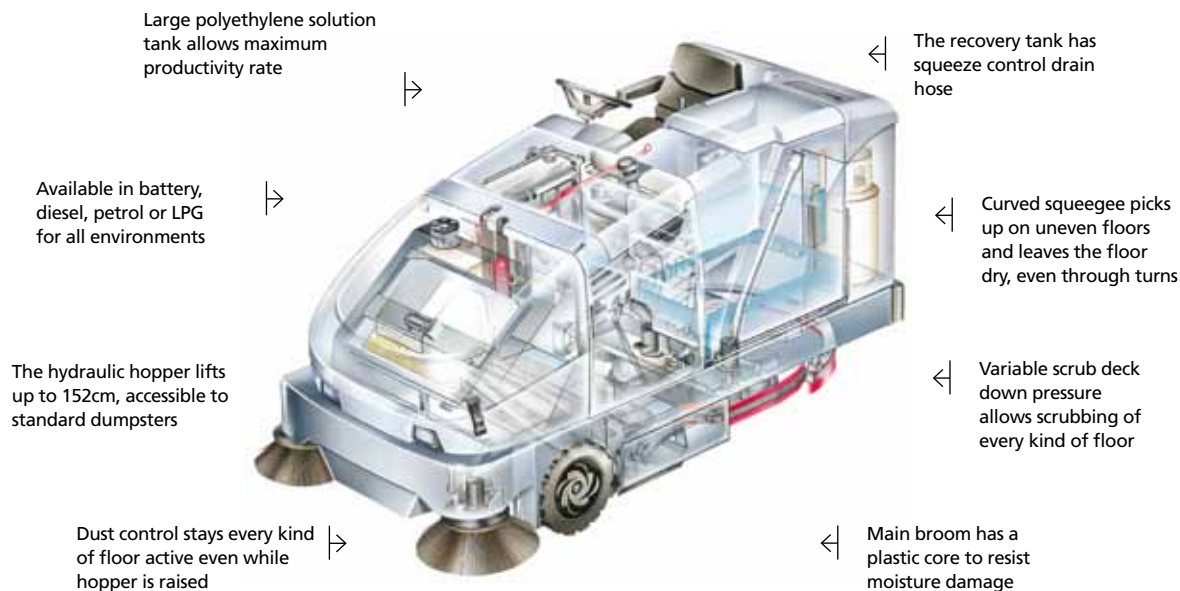

Technical specifications

Description	Unit	CR 1200B	CR 1200D/P/LPG	CR 1400D/P/LPG
Productivity rate theoretical/ actual	m ² /h	7900/5500	7900/5500	8800/6200
Sweeping width	mm	1600	1600	1600
Scrubbing width	mm	1200	1200	1400
Turning radius	mm	3000	3000	3000
Max speed	km/h	8.9	9.6	9.6
Solution/ recovery tank	litre	225/330	300/300	300/300
Hopper volume	litre	260	260	260
Main filter area	m ²	7.25	7.25	7.25
Brush/ pad diameter	mm	3x380/3x430	3x430	4x360
Brush speed/ pressure	rpm/kg	250/55-110-180	250/55-110-180	250/55-110-180
Length x width x height	cm	267x127x147	267 x 127 x 147	267 x 127 x 147
Operating weight	kg	2404	2187	2187

☒ Specifications and details are subject to change without prior notice.



Nilfisk-Advance Limited,
Unit 24, Hillside Business Park
Kempson Way
Bury St. Edmunds,
Suffolk IP32 7EA
Tel. (01284) 763163
Fax (01284) 750562
www.nilfisk.co.uk

Your local distributor is: